
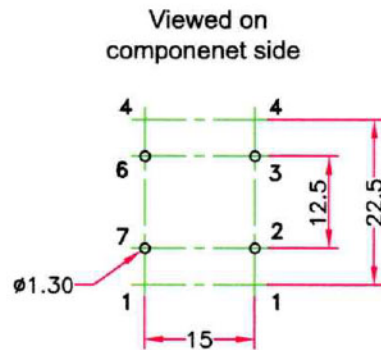




DATA SHEET

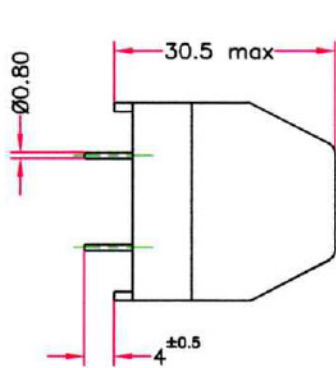

TECHNICAL DATA :

- Core : toroid $\varnothing 23 / \varnothing 14 / H7 \mu i$ 6000 ferrite material or equivalent
- Wire : $\varnothing 0.28$ grade 1 class F or equivalent
- Rated current per winding : 0.7A referred to 250V – 50Hz and +60°C ambient temperature
- Rated inductance per winding : 39mH +50% –30% at 10KHz ; 0.1mA
- Test voltage between windings : 1500VAC – 50Hz , 2 sec
- Climatic category : DIN GKC (-40 to +125°C; humidity cat. C)
- Case material : PBT at 30% fibreglass UL94-V0 or equivalent

RoHS compliance

Please, refer to general catalog for unspecified parameters

a	
IND	DATE

Radiohm Specification



DIM. IN MILLIMETERS

Designation : 42V30 0700

Part number : _____

Date : 04/05/2018

Preliminary :

Final :

Customer Specification Approval

Part number : _____

Signature : _____

Name : _____

Title : _____

Date : _____