



Φ5.2x20mm, RoHS Compliant & Pb-Free GLASS TUBE FUSE (FAST-BLOW) 玻璃保险丝管 (速断型)


TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证								REFERENCE (A ² .Sec.) (RoHS) iT 参考值	
		UL(cUL)		UR(cUR)		CSA		PSE			KC
		H	L	H	L	H	L	H	L		
51NM,52NM-0100H/L	100mA	●	●	●	●	●	●	●	●		
51NM,52NM-0125H/L	125mA	●	●	●	●	●	●	●	●		
51NM,52NM-0150H/L	150mA	●	●	●	●	●	●	●	●		
51NM,52NM-0160H/L	160mA	●	●	●	●	●	●	●	●		
51NM,52NM-0200H/L	200mA	●	●	●	●	●	●	●	●	0.02697	
51NM,52NM-0250H/L	250mA	●	●	●	●	●	●	●	●	0.03371	
51NM,52NM-0300H/L	300mA	●	●	●	●	●	●	●	●	0.04045	
51NM,52NM-0315H/L	315mA	●	●	●	●	●	●	●	●	0.04247	
51NM,52NM-0350H/L	350mA	●	●	●	●	●	●	●	●	0.04719	
51NM,52NM-0400H/L	400mA	●	●	●	●	●	●	●	●	0.06145	
51NM,52NM-0500H/L	500mA	●	●	●	●	●	●	●	●	0.07681	
51NM,52NM-0600H/L	600mA	●	●	●	●	●	●	●	●	0.1224	
51NM,52NM-0630H/L	630mA	●	●	●	●	●	●	●	●	0.1790	
51NM,52NM-0750H/L	750mA	●	●	●	●	●	●	●	●	0.3040	
51NM,52NM-0800H/L	800mA	●	●	●	●	●	●	●	●	0.3550	
51NM,52NM-010H/L	1A	●	●	●	●	●	●	●	●	0.6167	
51NM,52NM-012H/L	1.2A	●	●	●	●	●	●	●	●	1.400	
51NM,52NM-013H/L	1.25A	●	●	●	●	●	●	●	●	1.540	
51NM,52NM-015H/L	1.5A	●	●	●	●	●	●	●	●	2.076	
51NM,52NM-016H/L	1.6A	●	●	●	●	●	●	●	●	3.450	
51NM,52NM-020H/L	2A	●	●	●	●	●	●	●	●	5.149	
51NM,52NM-025H/L	2.5A	●	●	●	●	●	●	●	●	5.761	
51NM,52NM-030H/L	3A	●	●	●	●	●	●	●	●	9.722	
51NM,52NM-032H/L	3.15A	●	●	●	●	●	●	●	●	9.835	
51NM,52NM-035H/L	3.5A	●	●	●	●	●	●	●	●	13.52	
51NM,52NM-040H/L	4A	●	●	●	●	●	●	●	●	15.80	
51NM,52NM-050H/L	5A	●	●	●	●	●	●	●	●	29.11	
51NM,52NM-060H/L	6A	●	●	●	●	●	●	●	●	47.42	
51NM,52NM-063H/L	6.3A	●	●	●	●	●	●	●	●	59.24	
51NM,52NM-070H/L	7A	●	●	●	●	●	●	●	●	73.10	
51NM,52NM-080H/L	8A	●	●	●	●	●	●	●	●	100.0	
51NM,52NM-090H/L	9A							●	●	153.9	
51NM,52NM-100H/L	10A							●	●	171.0	
51NM,52NM-120H/L	12A							●	●	306.2	
51NM,52NM-150H/L	15A							●	●	382.8	

H DENOTES FOR 250V H 表示 250V
L DENOTES FOR 125V L 表示 125V
● DENOTES FOR APPROVED ● 表示已取得安全认证

Dimensions/ 尺寸:

Unit 单位: mm

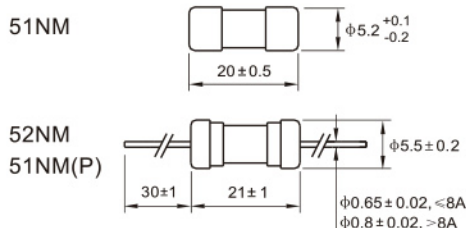

INTERRUPTING CAPACITY/ 分断能力:

10,000 amperes at 125V AC (32mA-8A)
35 amperes at 250V AC (32mA-1A)
100 amperes at 250V AC (1.2A-3.5A)
200 amperes at 250V AC (4A-8A)
100 amperes at 125V AC (1A-15A) PSE (51NM)
500 amperes at 125V AC (1A-15A) PSE (52NM)
100 amperes at 250V AC (1A-15A) PSE (51NM/52NM)
100 amperes at 250V AC (100mA-7A) KC

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
135%	1 hour Max.	最慢 1 小时
200%	5 seconds Max.	最慢 5 秒

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max

Solderability/ 可焊性: 245°C ± 5°C, 5s ± 0.5s

51NM/52NM AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

51NM/52NM 平均 I-T 曲线图 (仅供参考)

