





CO1614

2.54x(No. Of Contacts/2-1)



**SPECIFICATIONS**  
 Current Rating: 3 Amp Max  
 Dielectric Withstanding Voltage: 1000V AC  
 R.M.S. For One Minute  
 Contact Resistance: 20Milliohms Max.  
 Insulation Resistance: 5000 Megohms Min.  
 At 1000V DC  
 Operating Temperature: -55°C To +105°C  
 Contact : SQ 0.64mm, Brass, Gold Plating  
 Insulation : PBT(UL 94V-0)

Recommended P.C.Board layout  
 Bottom View

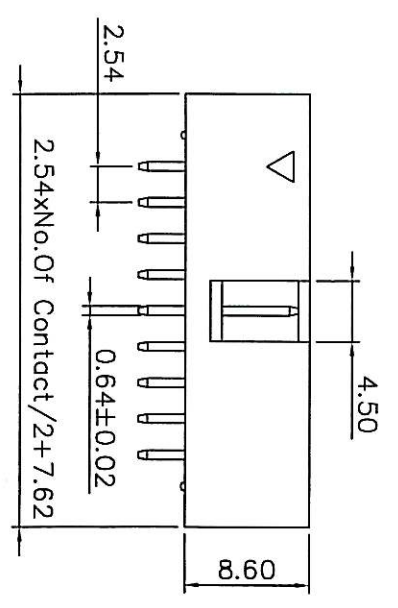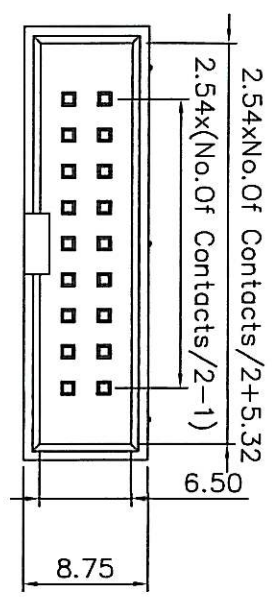

CO1614

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		AREA	
D14		MEI		.X ±0.30			
SCALE		CHECKED BY		.XX ±0.20		REVISIONS	
NONE		DRAWING BY		AWG.		CHK	
5		REV.		UNIT		DATE	
4		A		mm			
3							
2							
1							