



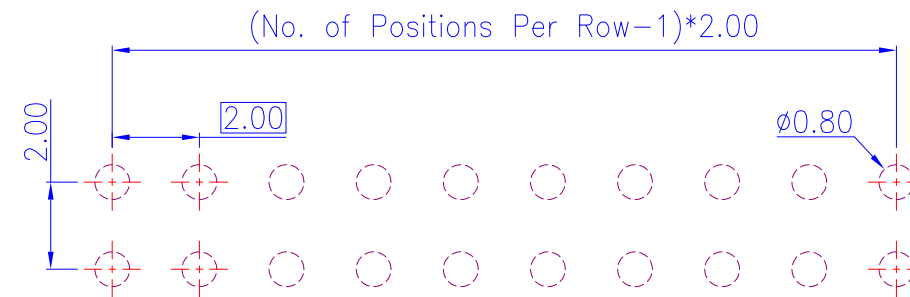


for Draw No.: HD2311-101 HD2311-201 HD2311-401



Code	A	B	C	D	Date	Note	Code	A	B	C	D	Date	Note
01	8.80	4.00	2.80	2.00	Nov. 22, 2004		26						
02	14.00	5.00	7.00	2.00	Nov. 22, 2004		27						
03	8.70	3.90	2.80	2.00	Nov. 22, 2004		28						
04	8.80	3.80	3.00	2.00	Nov. 22, 2004		29						
05	7.90	3.90	2.00	2.00	Jan. 17, 2006		30						
06	8.10	4.30	2.30	1.50	Feb. 21, 2006		31						
07	8.50	4.00	2.50	2.00	Mar. 09, 2006		32						
08	6.00	2.50	2.50	1.00	Jun. 27, 2006		33						
09	7.50	4.00	2.50	1.00	Aug. 11, 2006		34						
10	11.50	7.00	2.50	2.00	Aug. 17, 2006		35						
11	7.30	3.80	1.50	2.00	Oct. 23, 2006		36						
12	16.90	12.40	2.50	2.00	Nov. 21, 2006		37						
13	13.80	9.00	2.80	2.00	Nov. 22, 2006		38						
14	13.70	8.70	3.00	2.00	Nov. 22, 2006		39						
15	8.20	3.70	3.00	1.50	Dec. 27, 2006		40						
16	9.80	5.00	2.80	2.00	Apr. 18, 2007		41						
17	7.60	2.80	2.80	2.00	Aug. 10, 2007		42						
18	10.80	4.00	2.80	4.00	Aug. 15, 2007		43						
19	18.00	13.00	3.00	2.00	Nov. 13, 2007		44						
20	8.20	3.20	3.50	1.50	Apr. 28, 2008		45						
21	8.70	3.70	3.00	2.00	Oct. 02, 2008		46						
22	10.00	4.00	4.00	2.00	Apr. 20, 2009		47						
23							48						
24							49						
25							50						

	<i>Material and Finish</i>	<i>Electrical Characteristics</i>	<i>Mechanical Characteristics</i>	Tolerance 0.0 ±0.30 0.00 ±0.20 0.000 ±0.10	Scale 1:1	Unit mm	Drawn By 	Checked By 	Approved By 	Drawing No. HD2311-001	Title Length Options 2.00mm Post Header PCB Mount Vertical
--	----------------------------	-----------------------------------	-----------------------------------	---	--------------	------------	---	---	--	---------------------------	---

Rev.	Date	Description
A	2004/11/22	New Drawing
B	2007/04/27	Modify P/N

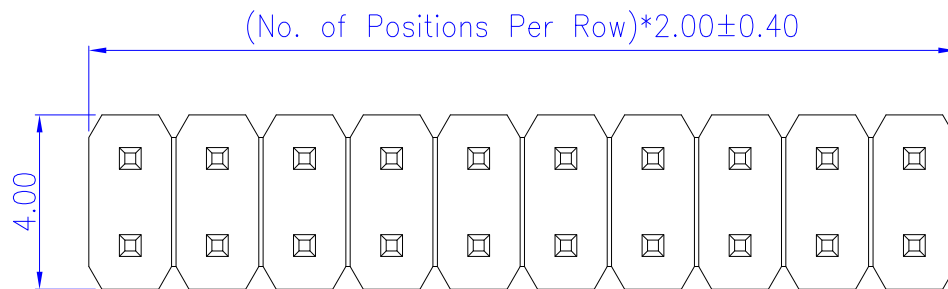

PCB Layout
(Top View)

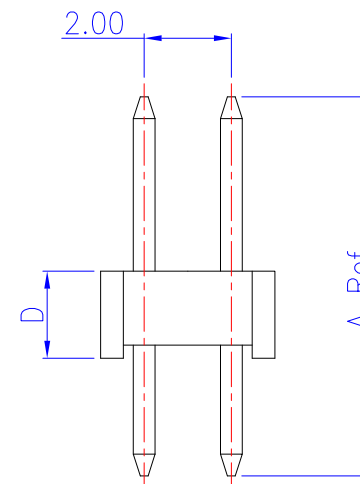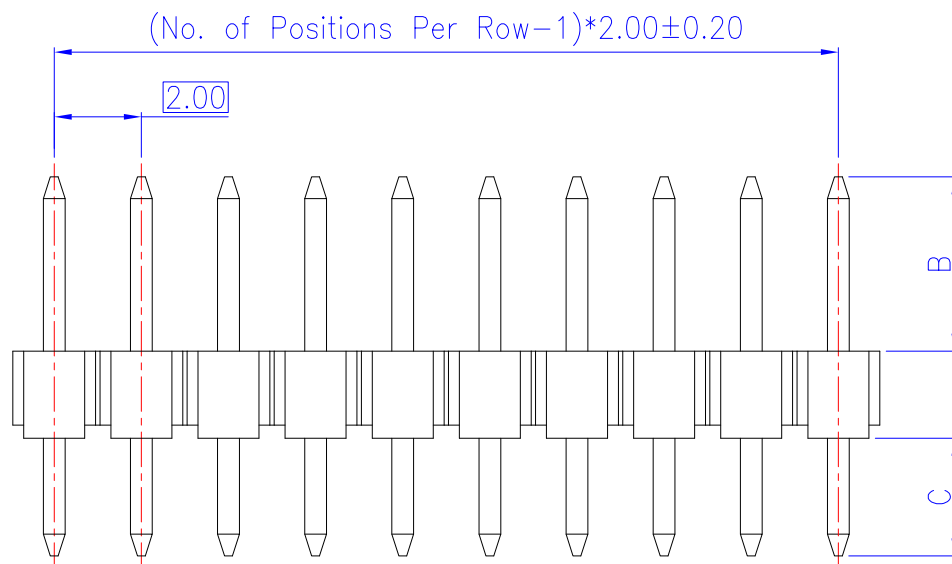

Order Information

2311 ** * - ** 2 **

Length Options
(Ref. Draw No. HD2311-001)

Housing Option
H : Nylon 6T
Blank : PBT

Terminal Plating Options
00: Gold Flash
30: 10u" Gold
40: 15u" Gold

No. of Positions Per Row

Material and Finish	Electrical Characteristics	Mechanical Characteristics	Tolerance	Scale	Unit	mm	Drawn By	Checked By	Approved By
1. Housing: Thermoplastic (UL94V-0), Black. 2. Terminal: Sq. 0.50mm Copper Alloy, Gold Plating.	1. Current Rating: 1.0 Amp. Max.. 2. Dielectric Withstand Voltage: 800V AC RMS for 60Seconds. 3. Insulation Resistance: 1000M Ohms Min. at 500V DC.	1. Operating Temperature: -55°C ~ +105°C	0.0 ±0.30 0.00 ±0.20 0.000 ±0.10	1:1	mm				
			Drawing No. HD2311-201						
			Title 2.00mm Post Header PCB Mount Vertical Dual Rows						