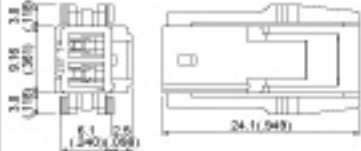


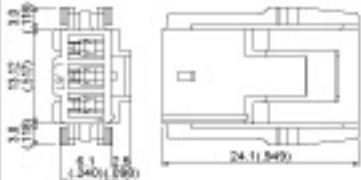


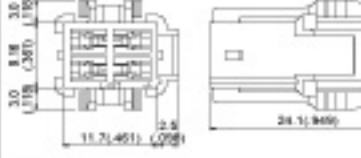


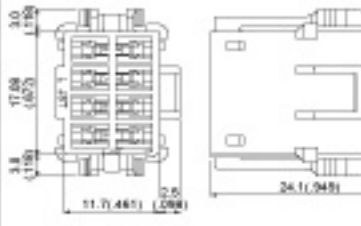




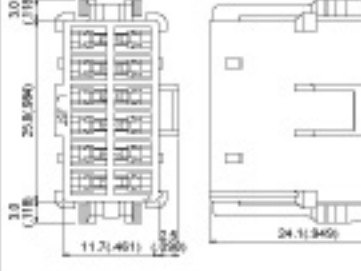




# HL CONNECTOR

## Housing

Material: Housing...Nylon 66, UL94V-0, white  
Retainer...Glass-filled nylon 66, UL94V-0, ivory

Circuits	Voltage rating	Current rating	Receptacle housing(for pin contact)		Plug housing(for socket contact)		Retainer	
2	300V	7.0A	<b>HLR-02V</b> 	Q'ty / bag 1,000	<b>HLP-02V</b> 	Q'ty / bag 1,000	<b>HLS-02V</b> (commonly used for 2-circuit housing and 4-circuit housing) 	Q'ty / bag 1,000
3	300V	6.0A	<b>HLR-03V</b> 	Q'ty / bag 500	<b>HLP-03V</b> 	Q'ty / bag 1,000	<b>HLS-03V</b> 	Q'ty / bag 1,000
4	300V	6.0A	<b>HLR-04V</b> 	Q'ty / bag 500	<b>HLP-04V</b> 	Q'ty / bag 500	<b>HLS-02V</b> (commonly used for 2-circuit housing and 4-circuit housing) 	Q'ty / bag 1,000
8	300V	4.0A	<b>HLR-08V</b> 	Q'ty / bag 500	<b>HLP-08V</b> 	Q'ty / bag 500	<b>HLS-08V</b> 	Q'ty / bag 1,000
9	300V	4.0A	<b>HLR-09VF</b> 	Q'ty / bag 500	<b>HLP-09V</b> 	Q'ty / bag 500	—	—
12	300V	3.0A	<b>HLR-12V</b> 	Q'ty / bag 500	<b>HLP-12V</b> 	Q'ty / bag 500	<b>HLS-12V</b> 	Q'ty / bag 1,000