


RA CONNECTOR

Contact

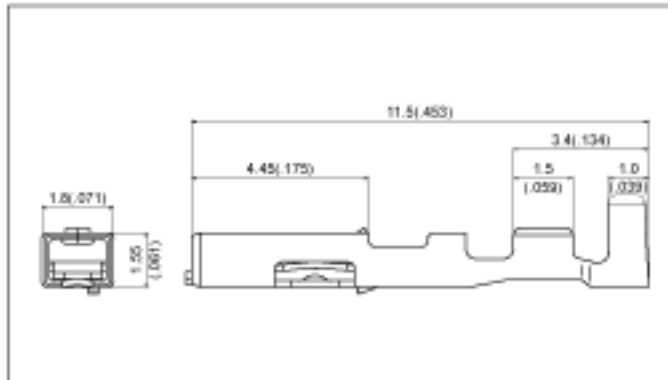


Model No.	Applicable wire			Qty / reel
	mm ²	AWG #	Insulation O.D. mm(in.)	
RA-SC1290	0.13 to 0.33	26 to 22	1.3 to 1.7(0.028 to .035)	8,000

Material and Finish

Phosphor bronze, tin-plated

Note: Contact JST for gold-plated contacts.

Housing

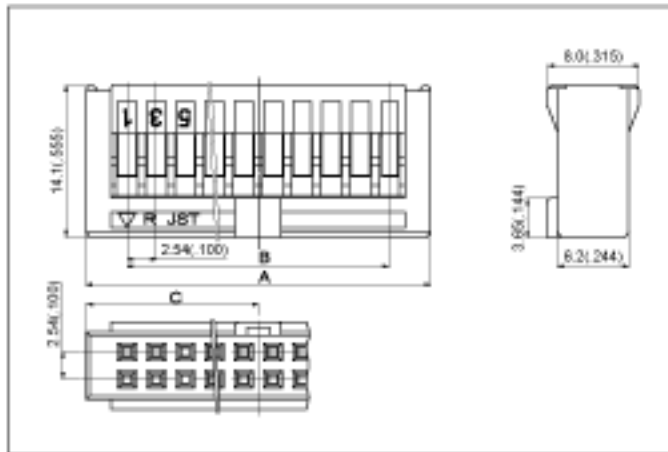

Circuits	Model No.	Dimensions mm(in.)			Qty / box
		A	B	C	
10	RA-1011	10.16(.400)	17.50(.689)	8.75(.344)	500
16	RA-1611	17.78(.700)	25.12(.989)	12.06(.484)	500
20	RA-2011	22.86(.900)	30.20(1.189)	15.10(.594)	500
26	RA-2611	30.48(1.200)	37.82(1.489)	18.91(.744)	1,000
30	RA-3011	35.56(1.400)	42.90(1.689)	21.45(.844)	200
34	RA-3411	40.64(1.600)	47.98(1.889)	23.99(.944)	250
40	RA-4011	48.26(1.900)	55.80(2.189)	27.80(1.094)	200
50	RA-5011	60.96(2.400)	68.30(2.689)	34.15(1.344)	200
60	RA-6011	73.66(2.900)	81.00(3.189)	40.90(1.594)	250

Material

Glass-filled PBT, UL94V-0, natural (black)

Applicator for the semi-automatic press AP-K2N

Contact	Crimp applicator MKS-L		Compact crimp applicator MKS-LS		Strip-crimp applicator MKS-SC
	with safety cover	without safety cover	with safety cover	without safety cover	with safety cover
RA-SC1290	APLMK RA-SC12	APLNC RA-SC12	APLMKS RA-SC12	APLLSNC RA-SC12	APLSC RA-SC12