

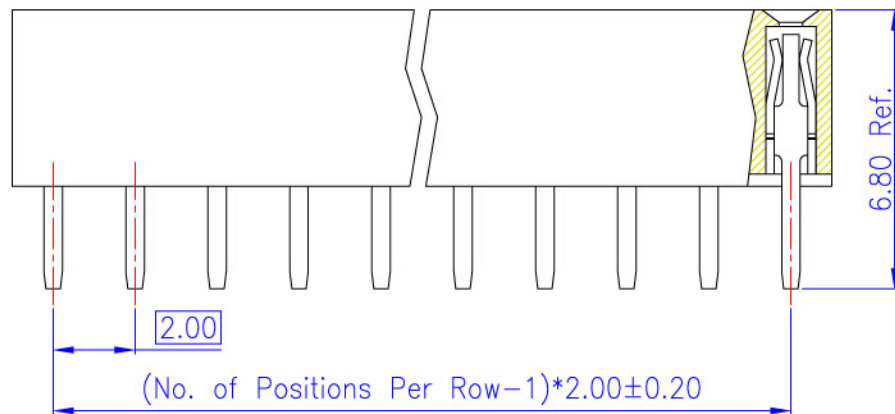
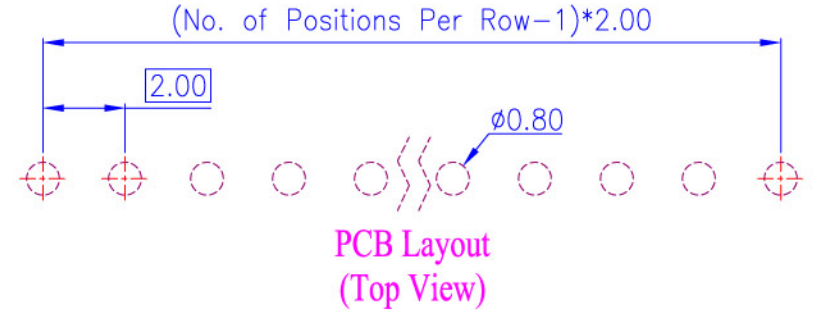


Rev.	Date	Description
A	2004/12/14	New Drawing
B	2006/12/29	Modify Drawing
C	2007/01/25	Modify Drawing
D	2010/03/23	Modify Nylon 9T → Nylon 6T

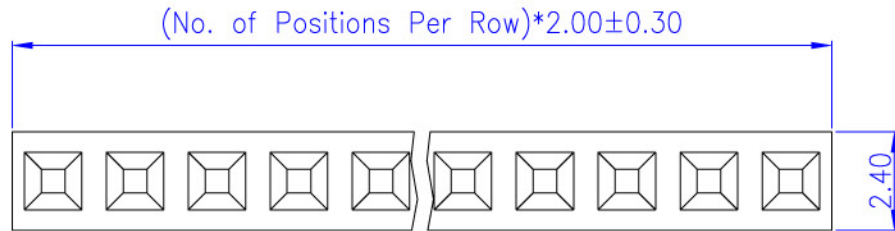

Order Information

212103- \*\* 1 \*\*

Terminal Plating Options

- 00: Gold Flash
- 10: 3u" Gold
- 20: 5u" Gold
- 30: 10u" Gold
- 40: 15u" Gold

No. of Positions Per Row  
(2~40 Pins)

<i>Material and Finish</i>	<i>Electrical Characteristics</i>	<i>Mechanical Characteristics</i>	Tolerance	Scale	Unit	Drawn By	Checked By	Approval By
1. Housing: Nylon 6T (UL94V-0), Black. 2. Terminal: Copper Alloy (t=0.20mm), Gold Plating.	1. Current Rating: 1.0 Amp. Max.. 2. Dielectric Withstand Voltage: 800V AC RMS for 60Seconds. 3. Insulation Resistance: 1000M Ohms Min. at 500V DC. 4. Connect Resistance: 30m Ohms Maximum.	1. Operating Temperature: -55°C ~ +105°C	0.0 ±0.30 0.00 ±0.20 0.000 ±0.10	1:1	mm			
			Drawing No. HD212103-1					
Title: 2.00mm Post Header Receptacle PCB Mount Vertical Type Single Row (H=4.30mm)								