

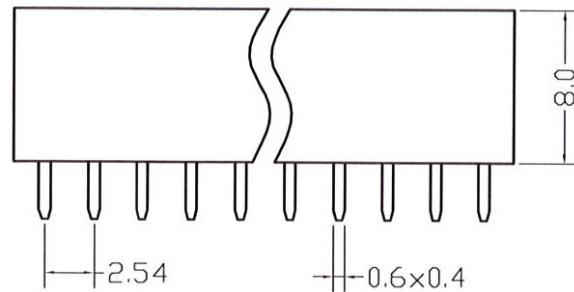


| 序号/RevNo. | 名称/Title | 文件编号/File No. |
|-----------|-----------|---------------|
| 1 | 114双排塑料件 | QJ/XYT-11125 |
| 2 | 114端子图(直) | QJ/XYT-11128 |

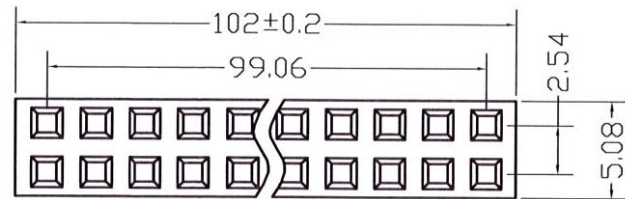

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature:-55 °C--+105 °C

Contact: Brass

Housing: PBT &30 % Glass Fiber(UL 94V-0)

要求:

1. 塑料件无裂痕。
2. 整排针成一直线，相邻针之间相互平行。

| 设计/Designed by | 绘图/Drawing by | 审核/Checked by | 批准/Approved by | 未注公差 General Tolerance | |
|----------------|---------------|---------------|----------------|---------------------------|------------|
| | | | | X. ±0.2 | X.' ±2' |
| | | | | .X ±0.1 | .X' ±1' |
| | | | | .XX ±0.05 | .XX' ±0.5' |
| | | | | .XXX ±0.01 | |
| 图名/Title | | | | 文件编号/File No. | |
| 114-DS80G | | | | QJ/XYT-12035 | |
| 备注/Remark | | | | 页序/Sheet | |
| | | | | 单位/Units: mm | |

| 序号/RevNo. | 更改记录/Revision note | 签名/Signature | 日期/Date |
|-----------|--------------------|--------------|---------|
| | | | |