


Receptacle

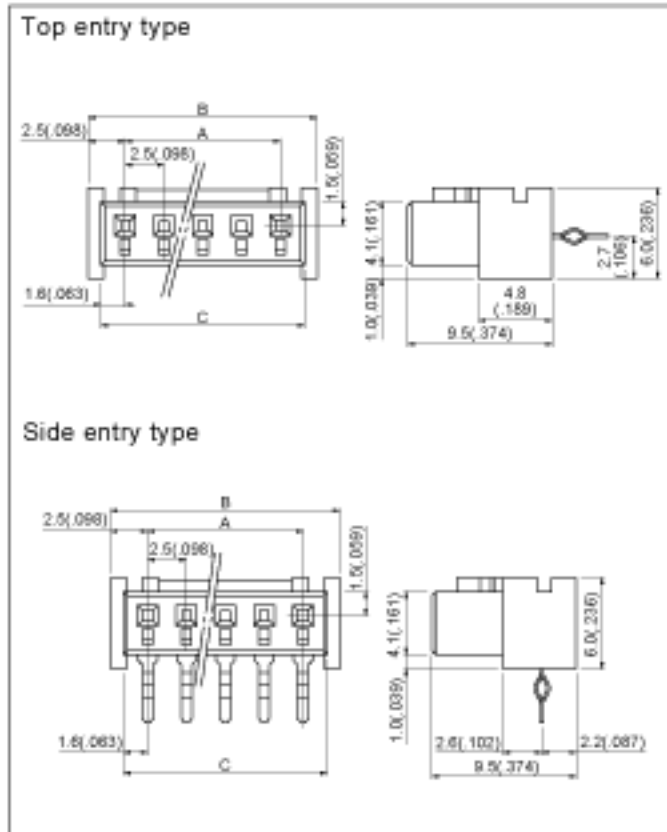

| Cir- cuits | Model No. | | Dimensions mm(in.) | | | Qty / box | |
|---------------|----------------------|-----------------------|--------------------|-------------|-------------|----------------------|-----------------------|
| | Top entry type | Side entry type | A | B | C | Top entry type | Side entry type |
| 3 | 03JQ-BT | 03JQ-ST | 5.0(.197) | 10.0(.394) | 8.2(.323) | 500 | 500 |
| 4 | 04JQ-BT | 04JQ-ST | 7.5(.295) | 12.5(.492) | 10.7(.421) | 500 | 500 |
| 5 | 05JQ-BT | 05JQ-ST | 10.0(.394) | 15.0(.591) | 13.2(.520) | 500 | 500 |
| 6 | 06JQ-BT | 06JQ-ST | 12.5(.492) | 17.5(.689) | 15.7(.618) | 500 | 500 |
| 7 | 07JQ-BT | 07JQ-ST | 15.0(.591) | 20.0(.787) | 18.2(.717) | 250 | 250 |
| 8 | 08JQ-BT | 08JQ-ST | 17.5(.689) | 22.5(.886) | 20.7(.815) | 200 | 250 |
| 9 | 09JQ-BT | 09JQ-ST | 20.0(.787) | 25.0(.984) | 23.2(.913) | 200 | 250 |
| 10 | 10JQ-BT | 10JQ-ST | 22.5(.886) | 27.5(1.083) | 25.7(1.012) | 250 | 250 |
| 11 | 11JQ-BT | 11JQ-ST | 25.0(.984) | 30.0(1.181) | 28.2(1.110) | 250 | 250 |
| 12 | 12JQ-BT | 12JQ-ST | 27.5(1.083) | 32.5(1.280) | 30.7(1.209) | 200 | 200 |
| 13 | 13JQ-BT | 13JQ-ST | 30.0(1.181) | 35.0(1.387) | 33.2(1.307) | 200 | 200 |
| 15 | 15JQ-BT | 15JQ-ST | 35.0(1.378) | 40.0(1.574) | 38.2(1.504) | 100 | 100 |

Material and Finish

Contact: Phosphor bronze, tin-plated
Housing: Nylon 66, UL94V-0, natural (white)

Note: 13JQ-BT, 13JQ-ST, 15JQ-BT & 15JQ-ST are not TGV approved

Shrouded header

The shrouded headers are interchangeable with the XH crimp style connectors, the NR, the NRD and the BR insulation displacement connectors.