




H 50F




低分断能力玻璃保险丝管(速断型) LOW-BREAKING CAPACITY GLASS TUBE FUSE (QUICK-ACTING)

目录编号 CATALOG NO.	额定电流 CURRENT RATING	最大电压降 (mv) MAX. VOLTAGE DROP	安全认证 SAFETY APPROVALS									I ² T 参考值 REFERENCE (A ² ·Sec.) (RoHS)
			CCC	S	VDE	BSI	IMQ	IEC	CSA	PSE	KTL	
50F-0125H	125mA	2000										0.013
50F-0160H	160mA	2000									●	0.026
50F-0200H	200mA	1700	●	●	●	●	●	●	●	●	●	0.062
50F-0250H	250mA	1400	●	●	●	●	●	●	●	●	●	0.045
50F-0315H	315mA	1300	●	●	●	●	●	●	●	●	●	0.082
50F-0400H	400mA	1200	●	●	●	●	●	●	●	●	●	0.130
50F-0500H	500mA	1000	●	●	●	●	●	●	●	●	●	0.252
50F-0630H	630mA	650	●	●	●	●	●	●	●	●	●	0.441
50F-0750H	750mA	400	●	●	●	●	●	●	●	●	●	0.778
50F-0800H	800mA	240	●	●	●	●	●	●	●	●	●	0.671
50F-010H	1A	200	●	●	●	●	●	●	●	●	●	1.06
50F-013H	1.25A	200	●	●	●	●	●	●	●	●	●	1.81
50F-016H	1.6A	190	●	●	●	●	●	●	●	●	●	3.07
50F-020H	2A	170	●	●	●	●	●	●	●	●	●	8.19
50F-025H	2.5A	170	●	●	●	●	●	●	●	●	●	13.52
50F-032H	3.15A	150	●	●	●	●	●	●	●	●	●	26.64
50F-040H	4A	130	●	●	●	●	●	●	●	●	●	48.06
50F-050H	5A	130	●	●	●	●	●	●	●	●	●	60.00
50F-063H	6.3A	130	●	●	●	●	●	●	●	●	●	94.82
50F-080H	8A	130	●	●	●	●	●	●	●	●	●	182.1
50F-100H	10A	130	●	●	●	●	●	●	●	●	●	283.9
50F-120H	12A	100	●	●	●	●	●	●	●	●	●	428.5
50F-125H	12.5A	100	●	●	●	●	●	●	●	●	●	473.1
50F-150H	15A	100	●	●	●	●	●	●	●	●	●	716.9
50F-160H	16A	100	●	●	●	●	●	●	●	●	●	810.5
50F-200H	20A	100	●	●	●	●	●	●	●	●	●	1325

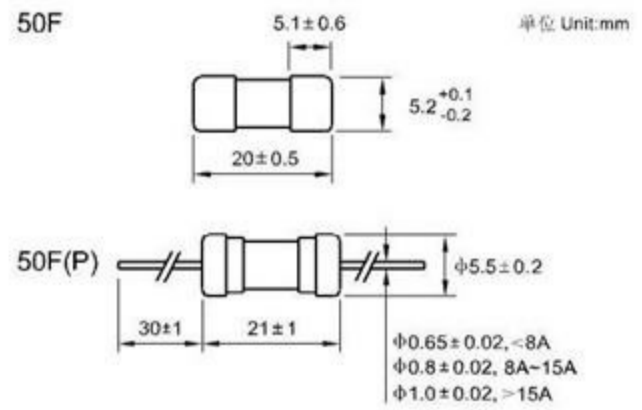

50F 平均 I-T 曲线图 (仅供参考)
50F AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE)

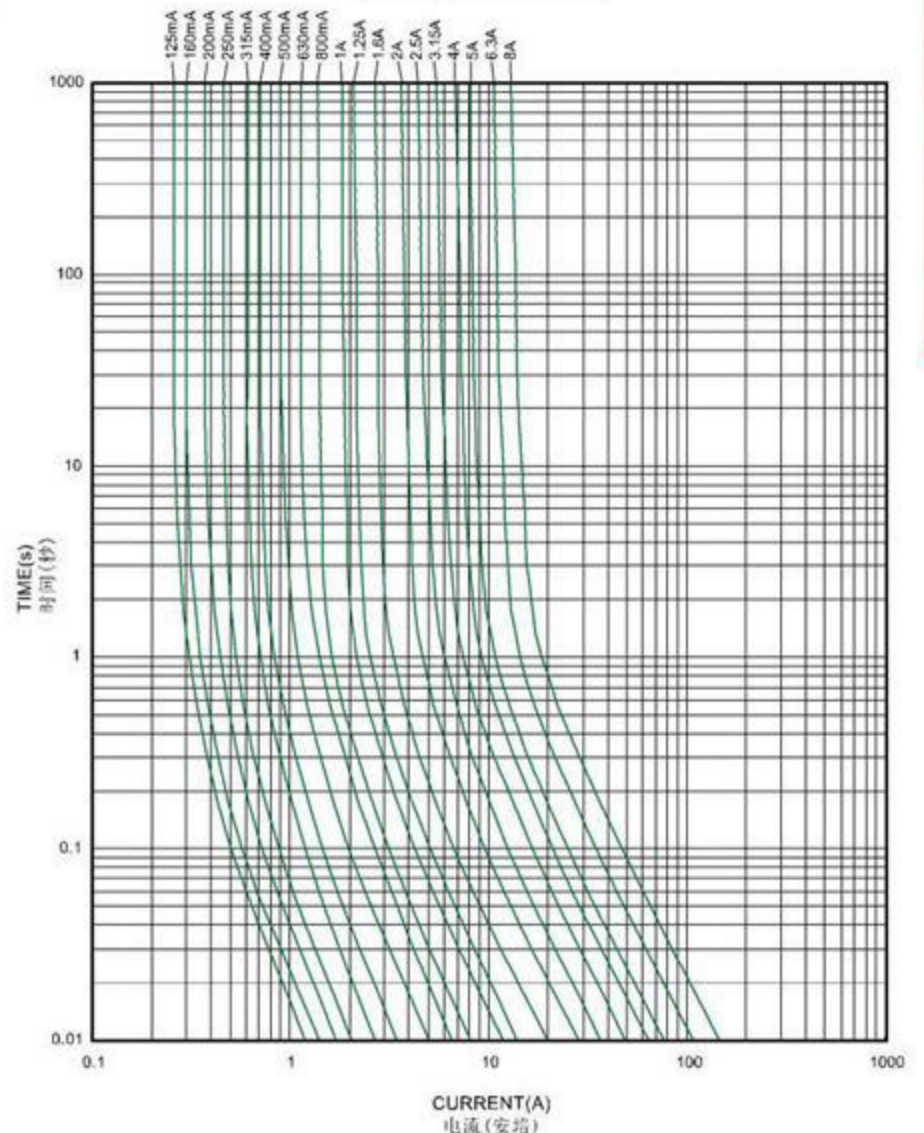

H DENOTES FOR 250V (H 表示 250V)

● DENOTES FOR APPROVED (● 表示已取得认证)

分断能力:

BREAKING CAPACITY:

35A OR 10In 250V AC WHICHEVER IS GREATER (125mA-10A)

100 amperes at 250V AC (12A-15A)

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME			
		125mA-6.3A	8A-10A	>10A- 16A	>16A
2.1In	最慢 Max.	30 minutes	30 minutes	30 minutes	30 minutes
2.75In	最快 Min.	50ms	50ms	50ms	100ms
	最慢 Max.	2 seconds	2 seconds	3seconds	6seconds
4In	最快 Min.	10ms	10ms	10ms	20ms
	最慢 Max.	300ms	400ms	400ms	600ms
10In	最慢 Max.	20ms	40ms	50ms	60ms