


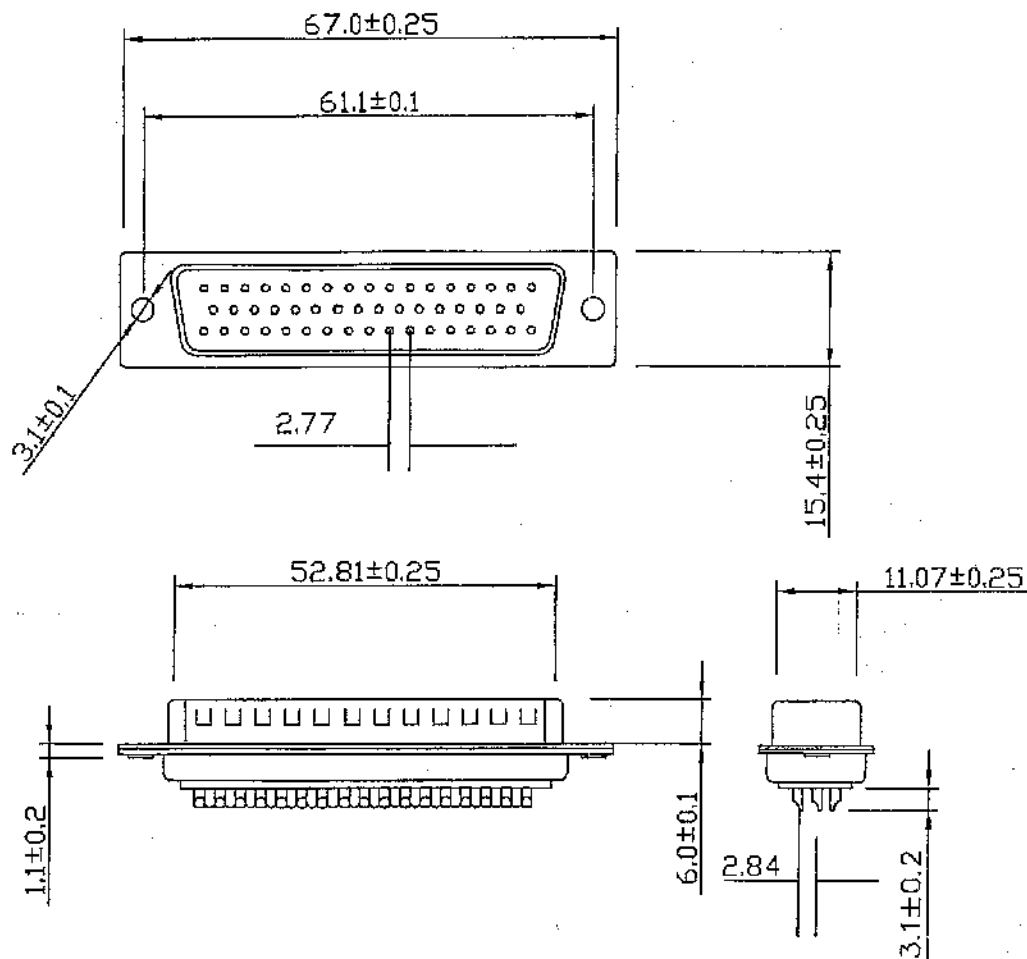

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 1 AMPERES.

DIELECTRIC WITHSTANDING VOLTAGE: AC 500V R.M.S

INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V.

CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.

OPERATING TEMPERATURE: -55C TO 105C.

MECHANICAL CHARACTERISTICS:

CONTACT INSERTION FORCE: KG MAXIMUM.

CONTACT SEPARATION FORCE: KG MINIMUM.

MATERIALS:

CONTACT: BRASS..

INSULATOR: P.B.T. UL 94-V0 RATED.

SHELL: COLD ROLLED STEEL.

FINISHES:

CONTACTS: GOLD FLASHED.

SHELL: NICKEL, TIN, ZINC PLATED.

力壯實業有限公司

PART NAME		D--50P SOLDER TYPE			
DWG.NO	HC-005-1	SCALE	1:1	DATE	86.07.23
CHECK		UNIT	mm	NAME	