

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 1 AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V R.M.S
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V
 CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.
 OPERATING TEMPERATURE: -55C TO 105C.

MECHANICAL CHARACTERISTICS:


CONTACT INSERTION FORCE: 1.5 KG MAXIMUM.
 CONTACT SEPARATION FORCE: 0.5 KG MINIMUM.

MATERIALS:

CONTACT: BRASS..
 INSULATOR: P.B.T. UL 94-V0 RATED.
 SHELL: COLD ROLLED STEEL.

FINISHES:

CONTACTS: GOLD FLASHED.
 SHELL: NICKEL, TIN, ZINC PLATED.

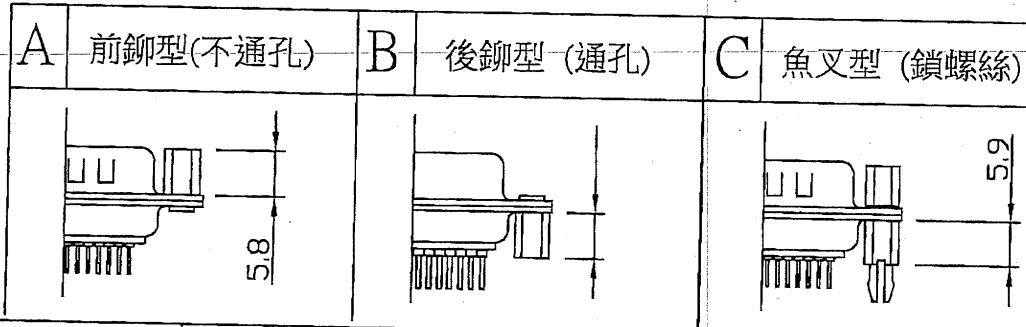

PART NO.	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	F±0.25
DD-O9P	30.80	25.00	16.92	8.30	12.60	5.90
DD-15P	39.20	33.32	25.25	8.30	12.60	5.90
DD-25P	53.05	47.04	38.96	8.30	12.60	5.90
DD-37P	69.40	63.50	55.42	8.30	12.60	5.90

力壯實業有限公司					
PART NAME		D-SUB MALE 180° DIP			
DWG.NO	HC-033	SCALE	1:1	DATE	2001.03.05
CHECK		UNIT	mm	NAME	Kent

RECEIVED TIME: 7 APR 2001 14:46 PRINT TIME: 7 APR 2001 14:46