


P1,P2:		M-Y417B	Customer No:	
		M-417A		
P3:		M-427B		

P1

DB9F

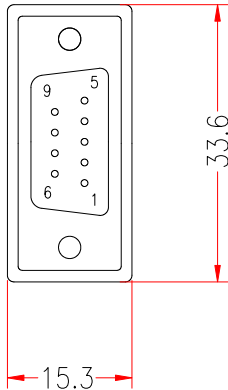

62.5±0.5


P3

①


④

③

②

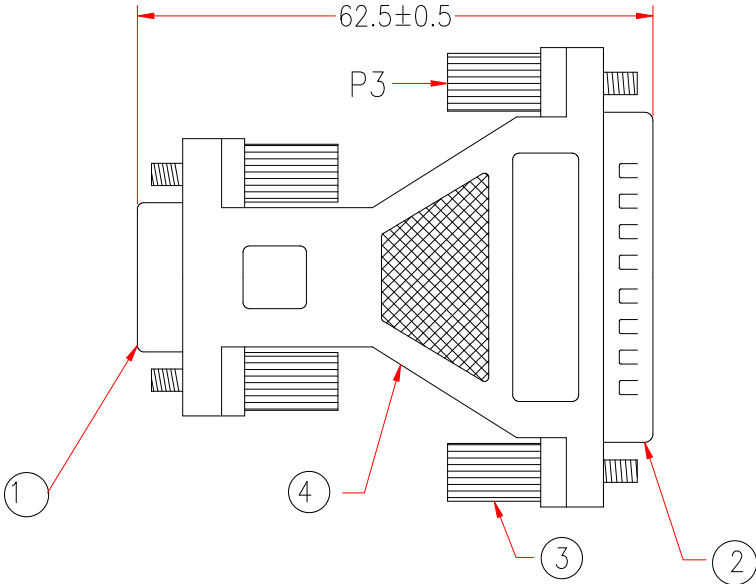

DB25M

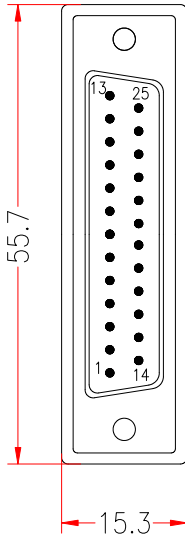

P2

4027

DB9F	DB25M
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
SHIELD	SHIELD

NOTE: ALL relevant materials are complied with RoHS directive

4	UL1007 26AWG INSULATOR, LENGTH 47mm(9pcs) , 55mm (1pcs) ,	10	M541		
	MOLDED PE COLOR TRANSPARENT		TWN		
	MOLDED PVC BEIGE		M304		
3	MOLDED THUMBSCREW #4-40, LENGTH 21.5mm BEIGE	4	M95		
2	DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M83		
1	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108		
No.	DESCRIPTION	Q'TY	Supplier		
APPROVED		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm			
CHECKED	TIAN				
DRAWING	LIU				
DATE	04/JUN/07	ITEM NO.	4027	UNIT:mm	 
		CHECKED			