




专利号 PATENT NO.: ZL 200620053742.1



径向引线式保险丝管 (速断型) RADIAL LEAD MICROFUSE (QUICK-ACTING)

5RF 平均 I-T 曲线图 (仅供参考)

5RF AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE)

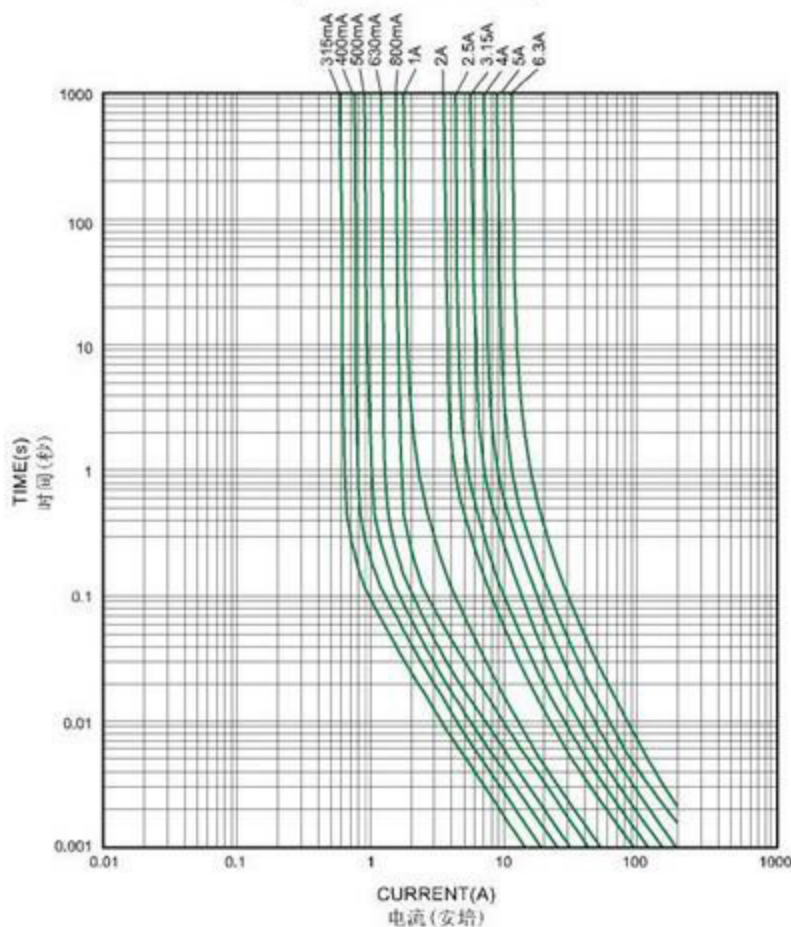

目录编号 CATALOG NO.	额定电流 CURRENT RATING	最大电压降 (mv) MAX. VOLTAGE DROP	安全认证 SAFETY APPROVALS						I <sup>2</sup> T 参考值 REFERENCE (A <sup>2</sup> ·Sec.) (RoHS)
			CCC	CQC	SEMKO	VDE	cURus	BSI	
5RF-0315H	315mA	400	●		●	●	●	○	0.024
5RF-0400H	400mA	370	●		●	●	●	○	0.044
5RF-0500H	500mA	350	●		●	●	●	○	0.074
5RF-0630H	630mA	320	●		●	●	●	○	0.128
5RF-0800H	800mA	300	●		●	●	●	○	0.235
5RF-010H	1A	280	●		●	●	●	○	0.328
5RF-013H	1.25A	280	●		●	●	●	○	0.563
5RF-016H	1.6A	250	●		●	●	●	○	1.11
5RF-020H	2A	240	●		●	●	●	○	1.71
5RF-025H	2.5A	200	●		●	●	●	○	2.96
5RF-032H	3.15A	180	●		●	●	●	○	2.8
5RF-040H	4A	160	●		●	●	●	○	4.61
5RF-050H	5A	150	●		●	●	●	○	7.56
5RF-063H	6.3A	150		●	●	●	●	○	13.4

H DENOTES FOR 250V (H 表示 250V)  
 ● DENOTES FOR APPROVED (●表示已取得认证)  
 ○ DENOTES FOR PENDING (○表示申请中)


分断能力:

BREAKING CAPACITY:  
 CCC/CQC/SEMKO/VDE/UR/BSI:  
 35A OR 10In 250V AC WHICHEVER IS GREATER  
 PSE:100A 250V AC


电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME
2.1In	最慢 Max.	30 minutes
2.75In	最快 Min.	10ms
	最慢 Max.	3 seconds
4In	最快 Min.	3ms
	最慢 Max.	300ms
10In	最慢 Max.	20ms

尺寸 DIMENSIONS: 5RF-XXXHL



编带规格 TAPING SPECIFICATIONS: 5RF-XXXH

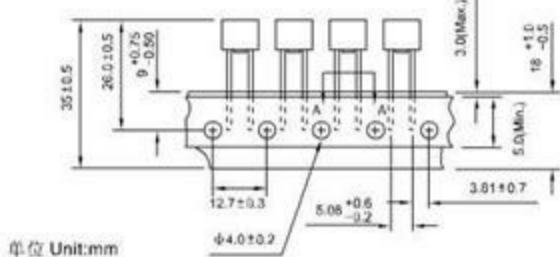


单位 Unit:mm

主体材料: 阻燃塑料, UL94-V0  
 MATERIALS: THERMOPLASTIC, UL94-V0

包装 PACKING:

1. 内盒 INNER BOX : AMMO PACK



1,000 pcs taped in one inner box  
 1,000 pcs / 内盒

2. 外箱 OUTER CARTON: 10 INNER BOXES/CARTON

尺寸 CARTON SIZE: L470xW355xH285(mm)

