


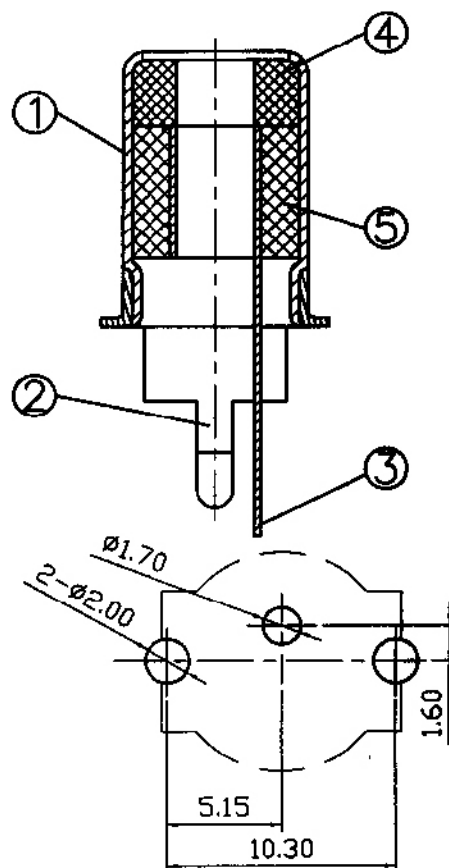


SCHEMATIC	
MODEL NO	U

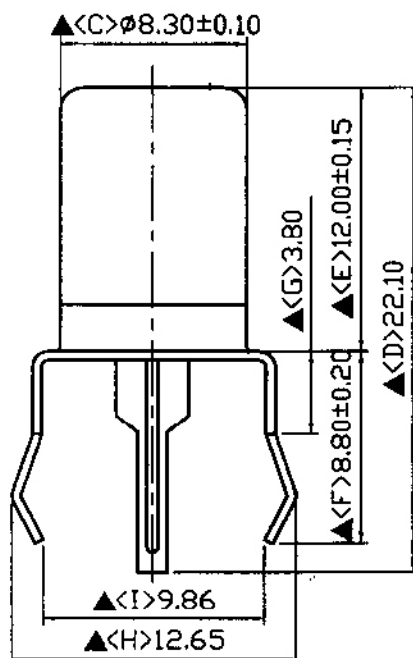

Pin Hole Layout
(Jack Bottom View)

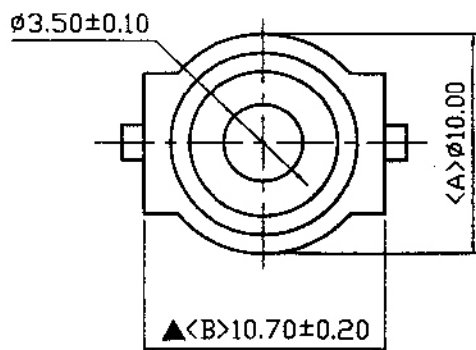

RoHS
Compliant

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

5.	Insulator	PBT	1	Black Color
4.	Insulator	PBT	1	Black Color
3.	Pin	0.25T Brass	1	Tin Plating
2.	Mounting Bracket	0.4T Iron	1	Tin Plating
1.	Phone Jack Shell	0.3T Brass	1	Nickel Plating
NO.	Description	Material	Q'TY	Finish



DATE	DWN	CHKD	APVD	MANAGER
08.03.2010	葉麗清	陳國強	陳國強	陳國強

PART NAME : PIN JACK	PART NUMBER: SCP606UNT1T0000G	VERSION: 5.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1