


Cat.5e 180 Degree Narrow Keystone Jack (UTP) / Dual Type(Krone & 110)

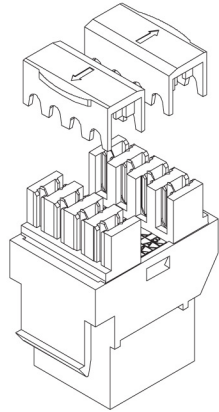

Performance:

Meets Cat.5e EIA/TIA 568B.1 Standard.

Materials:


Plastic Body : Fireproof ABS UL-94V0
 RJ-45 Jack : 8P8C 50 micro inches gold plated
 PCB : FR-4 / 1.0mm UL-94V0
 IDC Body : Fireproof ABS UL-94V0
 IDC Cap : Fireproof PC
 IDC Pin : Bronze & Tinned

Label Color Code : T568 A/B

IDC Description : For 22-26 AWG.




For 110 or Krone punch-down Tool

Dimensions : m/m



Color coding information

T568B:	T568A:
1—WH/OR	1—WH/GN
2—OR	2—GN
3—WH/GN	3—WH/OR
4—BL	4—BL
5—WH/BL	5—WH/BL
6—GN	6—OR
7—WH/BR	7—WH/BR
8—BR	8—BR



Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
 Contact Resistance : 20m ohms (max.)
 Current Rating : 1.5 Amps .
 DC Resistance : 0.1 ohm (max.)
 Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 25 Cycles (min.)
 RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

DRAW NO:		ITEM NO:	EKTHN-U1X
	APPR	CUSTOMER:	
UNIT:	m/m	DATE:	
SCALE:	DESIGN	TOLERANCE:	· ± 1 · X ± 0.2 · XX ± 0.15