


## Contact

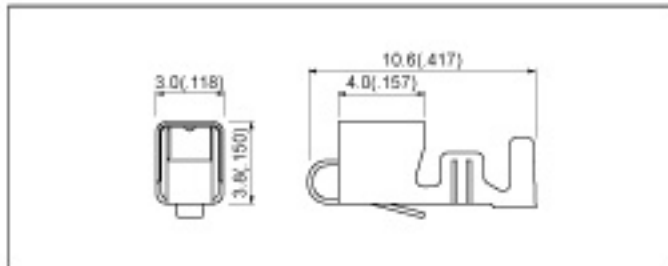


Model No.	Applicable wire			Qty / reel
	mm <sup>2</sup>	AWG #	Insulation O.D. mm(in.)	
<b>SVH-21T-P1.1</b>	0.33 to 0.83	22 to 18	1.7 to 3.9 (0.067 to .118)	4,500
<b>SVH-41T-P1.1</b>	0.5 to 1.25	20 to 16	1.7 to 3.9 (0.067 to .118)	3,500

### Material and Finish

Phosphor bronze, Sn-plated

Note: Contact JST for brass products.

## Housing

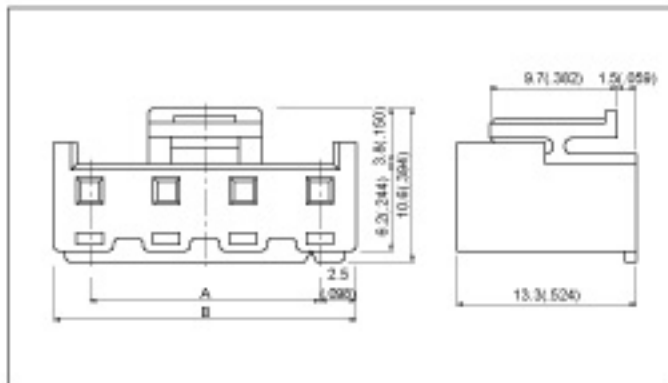

Circuits	Model No.	Dimension mm(in.)		Qty / bag
		A	B	
2	<b>NVR-02</b>	5.0 (197)	10.0 (394)	1,000
3	<b>NVR-03</b>	10.0 (394)	15.0 (591)	
4	<b>NVR-04</b>	15.0 (591)	20.0 (787)	


### Material

Nylon 6, UL94V-0, natural (white)

<For reference> As the color identification, the following alphabet shall be put in the underlined part. For availability, delivery and minimum order quantity, contact JST.

ex. **NVR-02-gg**  
 (blank) ...natural (white)  
 E ...blue

## Locking header

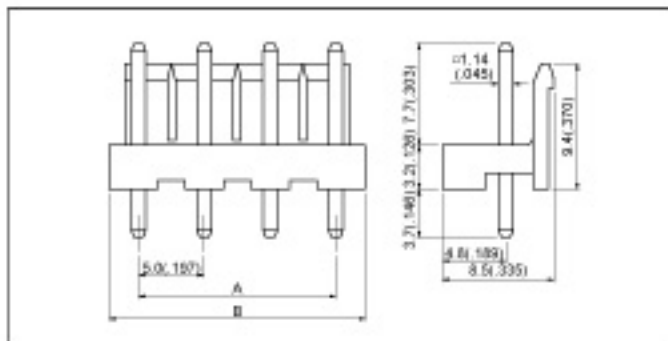

Circuits	Model No.	Dimension mm(in.)		Qty / box
		A	B	
2	<b>B02P-NV</b>	5.0 (197)	10.0 (394)	1,000
3	<b>B03P-NV</b>	10.0 (394)	15.0 (591)	700
4	<b>B04P-NV</b>	15.0 (591)	20.0 (787)	500

### Material and Finish

Post Brass, copper-undercoated, tin/lead-plated  
 Wafer: B02P-NV...Nylon 6, UL94V-0, natural (white)  
 B03P-NV & B04P-NV...Glass-filled PBT, UL94V-0, natural (white)

<For reference> As the color identification, the following alphabet shall be put in the underlined part. For availability, delivery and minimum order quantity, contact JST.

ex. **B02P-NV-gg**  
 (blank) ...natural (white)  
 BL...blue