

序号/RevNo.	名称/Title	文件编号/File No.
1	塑料件	QJ/XYT-11121
2	端子	QJ/XYT-11123

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA

Insulator Resistance: 1000M Ω min.at DC 500V

Current Rating: 1AMP




Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature:-55° C--+105° C

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

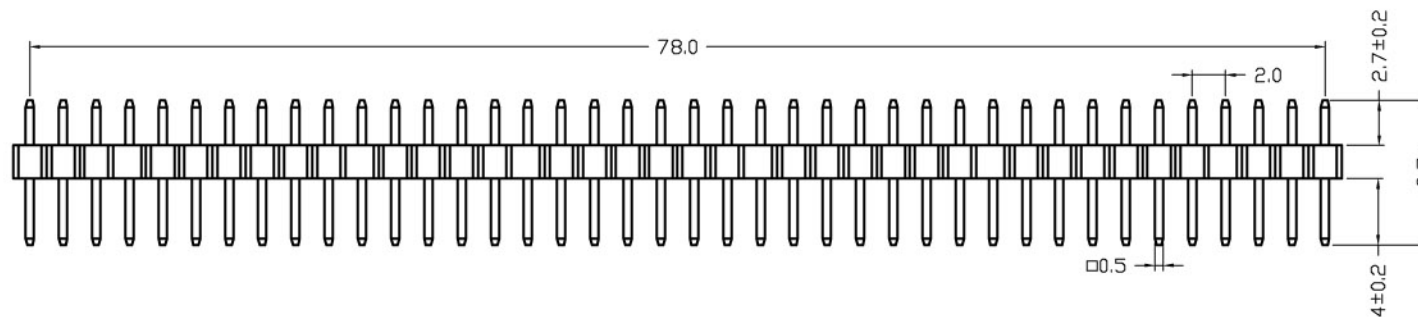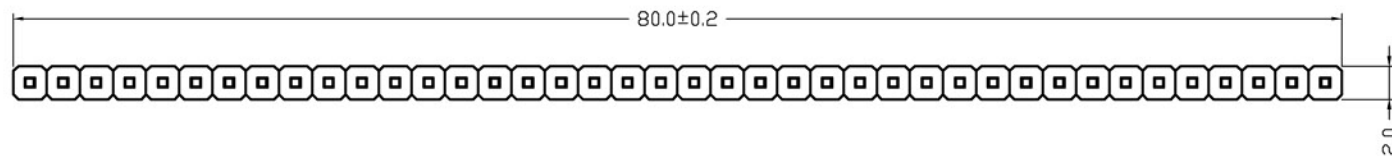

要求:

- 1.塑料件无裂痕。
- 2.整排端子成一直线，相邻端子之间相互平行。

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
		图名/Title	文件编号/File No.		X. ±0.2 X.' ±2'
		113-A-SS40G 产品图			.X ±0.1 .X' ±1'
					.XX ±0.05 .XX' ±0.5'
			页序/Sheet		.XXX ±0.01
		备注 /Remark	加拿大CIRCUIT		单位/Units: mm