

承認書

Specification For Approval

(RoHS Compliance)

客戶名稱 : 華原
Messrs


客戶料號 :
PART NO.

版本 : A
Version :

祥業料號 : R6H 6X10-2.5Ts
PART NO. :



日期 : 10-Mar-17
Date :

貴公司確認/蓋章
Approved by

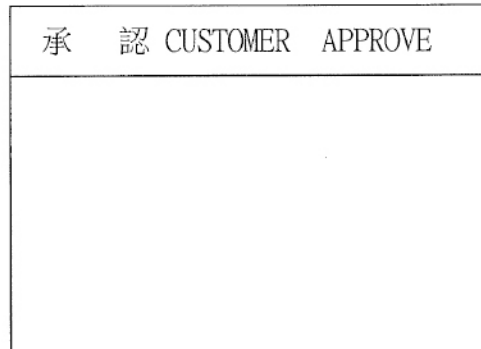


備註: 樣品如無問題,煩請貴司承認後盡快將承認書回傳我司!
若未簽回,有來訂單,我司則以此份承認書為標準出貨!

SPECIFICATION

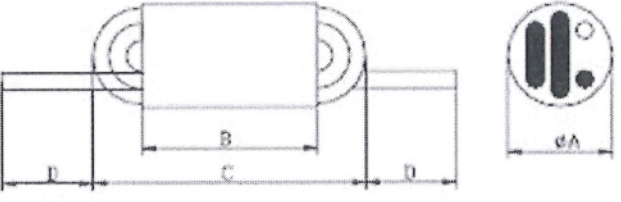Customer : 華原		Item : R6H 6X10-2.5Ts		Date : 10/MAR/17	
Mechanical Assembly			Version : A		
			Dimension		
			A	6.00 ±0.30	mm
			B	10.00 ±0.40	mm
			C	14.00 MAX	mm
			D	40.00 ±2.00	mm
			E		mm
			F		mm
			P		
			H		
Electrical Requirement					
Impedance	Min 400 Ω	Test Frequency	25MHz		
Impedance	Min 500 Ω	Test Frequency	100MHz		
Test equipment : HP E4991A					
WINDING : ψ0.5 2UEWX2.5 TS					
			REMARK :		
APPROVED BY		CHECKED BY		REPORTED BY	
					

INSPECTION DATA

Customer	華 原		Date	10-Mar-17					
Item	R6H 6X10-2.5Ts		Version	A					
Part No.			Test Frequency	1~1000MHz					
Test equipment	HP E4991A/16092A		WINDING	ϕ 0.5 2UEWX 2.5 Turns					
	IMPEDANCE			DIMENSION (UNIT : mm)					
FREQ.	25MHz	100MHz		A	B	C	D		
SPEC.	Min 400 Ω	Min 500 Ω		± 0.30 6.00	± 0.40 10.00	MAX 14.00	± 2.00 40.00		
1	558.0	629.0		6.00	10.01	12.20	40.32		
2	564.0	628.0		6.02	9.97	12.18	40.02		
3	563.0	629.0		6.00	9.99	12.23	40.24		
4	559.0	633.0		6.01	10.01	12.24	40.11		
5	569.0	628.0		6.02	9.96	12.50	39.66		
6									
7									
8									
9									
10									
X	562.6	629.4		6.01	9.99	12.27	40.07		
R	11.0	5.0		0.02	0.05	0.32	0.66		

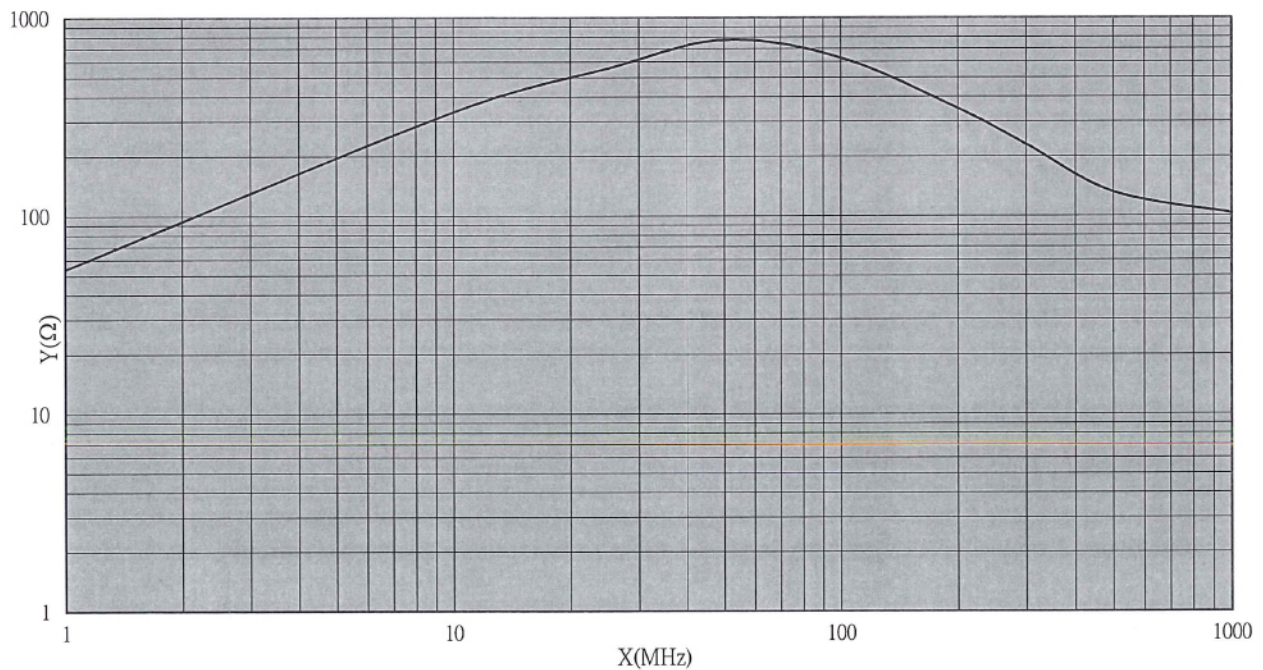

APPROVED BY:	CHECKED BY:	REPORTED BY:
王其祥		世鹏雄