


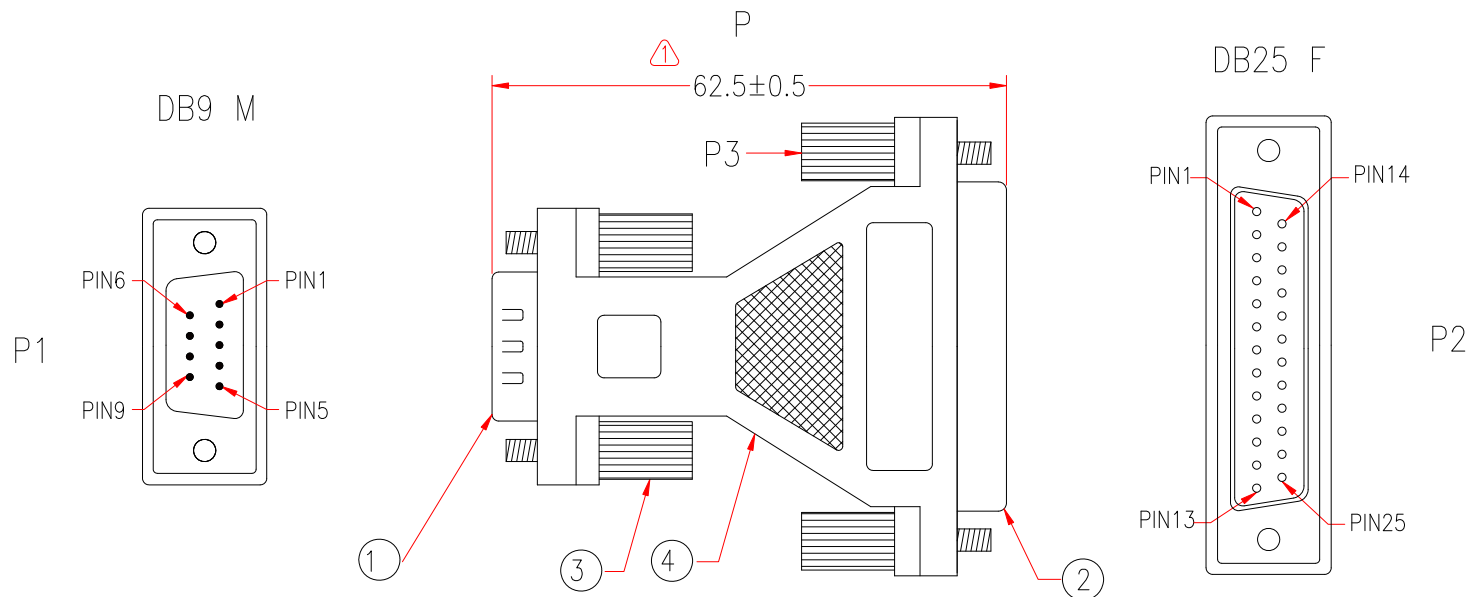

4026			
P1		P2	
1	_____	8	
2	_____	3	
3	_____	2	
4	_____	20	
5	_____	7	
6	_____	6	
7	_____	4	
8	_____	5	
9	_____	22	
SHIELD	_____	SHIELD	

⚠️ *NOTE: All relevant materials are complied with RoHS directive .

4	UL1061 26AWG INSULATOR WIRE, ID 1.0mm, LENGTH 47mm*9PCS, 55mm*1PCS, DRAWING No. EN002601C-013		10	M304
	MOLDED PE COLOR TRANSPARENT			M280
	MOLDED PVC BEIGE			M304
3	MOLDED THUMBSCREW #4-40, LENGTH 21.5mm, BEIGE		4set	M95
2	DB25 FEMALE, GOLD FLASH ON CONTACTS, BIUE INSULATOR		1	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR		1	M108
No.	DESCRIPTION		Q'TY	Supplier
APPROVED		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm		
CHECKED	HU			
DRAWING	MEI			
DATE	03/AUG/11			
ITEM NO.	4026		UNIT:mm	