


NH CONNECTOR

Contact

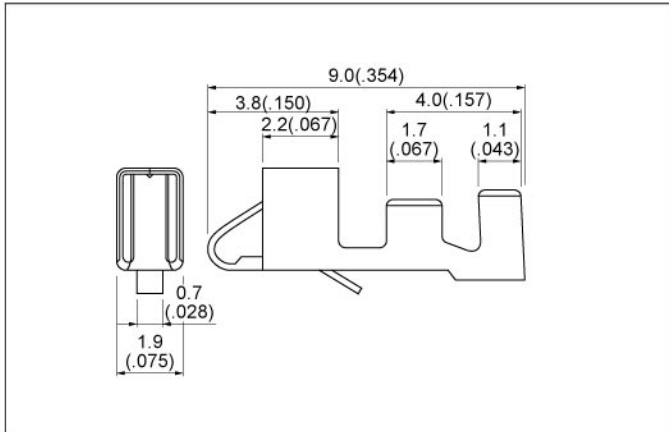

Model No.	Applicable wire			Q'ty / reel
	mm ²	AWG #	Insulation O.D. mm(in.)	
SHF-001T-0.8BS	0.08 to 0.33	28 to 22	1.2 to 1.7 (.047 to .067)	5,000
SHF-002T-0.8BS	0.05 to 0.08	30 to 28	0.9 to 1.2 (.035 to .047)	


Material and Finish

Phosphor bronze, tin-plated

Note:

1. Contact JST if you require gold-plated contacts.
2. Also contact JST if you require shielded wires, thin wires or other special wires.

Housing

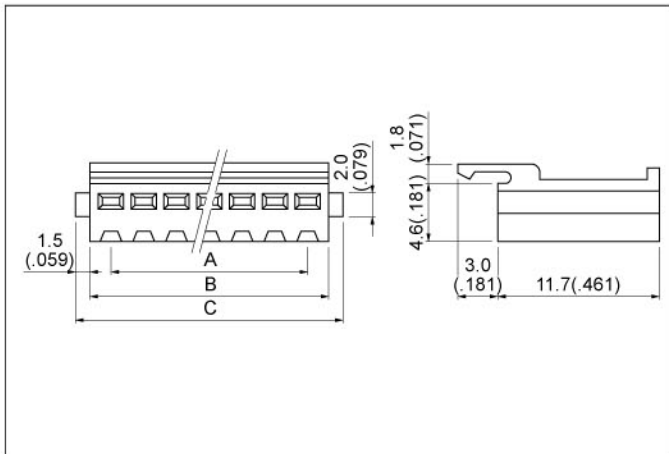

Circuits	Model No.	Dimensions mm(in.)			Q'ty / bag
		A	B	C	
2	H 2P-SHF-AA	2.5(.098)	5.7(.224)	8.7(.343)	1,000
3	H 3P-SHF-AA	5.0(.197)	8.2(.323)	11.2(.441)	1,000
4	H 4P-SHF-AA	7.5(.295)	10.7(.421)	13.7(.539)	1,000
5	H 5P-SHF-AA	10.0(.394)	13.2(.520)	16.2(.638)	1,000
6	H 6P-SHF-AA	12.5(.492)	15.7(.618)	18.7(.736)	1,000
7	H 7P-SHF-AA	15.0(.591)	18.2(.717)	21.2(.835)	500
8	H 8P-SHF-AA	17.5(.689)	20.7(.815)	23.7(.933)	500
9	H 9P-SHF-AA	20.0(.787)	23.2(.913)	26.2(1.031)	500
10	H10P-SHF-AA	22.5(.886)	25.7(1.012)	28.7(1.130)	500
11	H11P-SHF-AA	25.0(.984)	28.2(1.110)	31.2(1.228)	500
12	H12P-SHF-AA	27.5(1.083)	30.7(1.209)	33.7(1.327)	500
13	H13P-SHF-AA	30.0(1.181)	33.2(1.307)	36.2(1.425)	500
14	H14P-SHF-AA	32.5(1.280)	35.7(1.406)	38.7(1.524)	500
15	H15P-SHF-AA	35.0(1.378)	38.2(1.504)	41.2(1.622)	200
16	H16P-SHF-AA	37.5(1.476)	40.7(1.602)	43.7(1.720)	200
18	H18P-SHF-AA	42.5(1.673)	45.7(1.799)	48.7(1.917)	200
20	H20P-SHF-AA	47.5(1.870)	50.7(1.996)	53.7(2.114)	200
21	H21P-SHF-AA	50.0(1.969)	53.2(2.094)	56.2(2.213)	200
22	H22P-SHF-AA	52.5(2.067)	55.7(2.193)	58.7(2.311)	200
24	H24P-SHF-AA	57.5(2.264)	60.7(2.390)	63.7(2.508)	200
25	H25P-SHF-AA	60.0(2.363)	63.2(2.488)	66.2(2.606)	200

Material

Nylon 6, UL94V-0, natural (white)

<For reference> As the color identification, the following alphabet shall be put in the underlined part. For availability, delivery and minimum order quantity, contact JST.

ex. **H2P-SHF-AA-qq**
 (blank)...natural (white)
 K...black R...red TR...tomato red E...blue M...green
 O...orange N...brown