

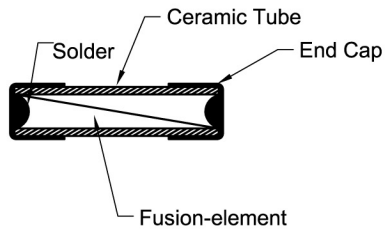



# MFH




# MFH-P

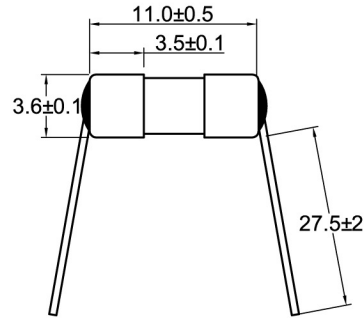

# MFH-PA

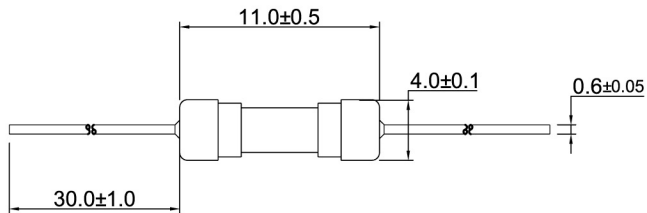

# MFH-PR

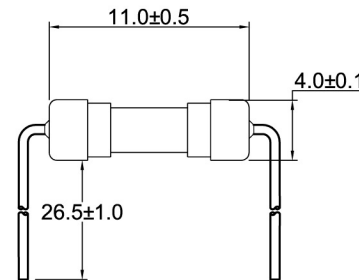

Rated Current	Breaking capacity	Rated Voltage	
100mA	@125V/AC 50A @250V/AC 50A	125V/250V	
125mA		125V/250V	
160mA		125V/250V	
200mA		125V/250V	
250mA		125V/250V	
300mA		125V/250V	
400mA		125V/250V	
500mA		125V/250V	
600mA		125V/250V	
630mA		125V/250V	
700mA	125V/250V		
800mA	125V/250V		
1A	@125V/AC 50A @250V/AC 50A	125V/250V	
1.25A		125V/250V	
1.5A		125V/250V	
1.6A		125V/250V	
2A		125V/250V	
2.5A		125V/250V	
3A		125V/250V	
3.15A		125V/250V	
3.5A		@125V/AC 50A @250V/AC 50A	125V/250V
4A			125V/250V
5A	125V/250V		
6A	125V/250V		
6.3A	125V/250V		
7A	125V/250V		
<del>8A</del>	125V/250V		
12A	@125V/AC,DC 50A	125V	
13A		125V	
15A		125V	

From:0.1-10A 125V/250V Approvals:

From:12-15A 125V Approvals:

Test Specification according to Standard UL 248-1,14

## Electrical Characteristic

Rated Current	1.0 In	2 In
In	Min.	Max.
0.1A-15A	4 h	60 S

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN MM  
TOLERANCE  
DECIMALS      ANGULAR  
X ± 0.5            ± 2°  
XX ± 0.25  
DO NOT SCALE DRAWING

P/N:

REV	1.0
-----	-----