
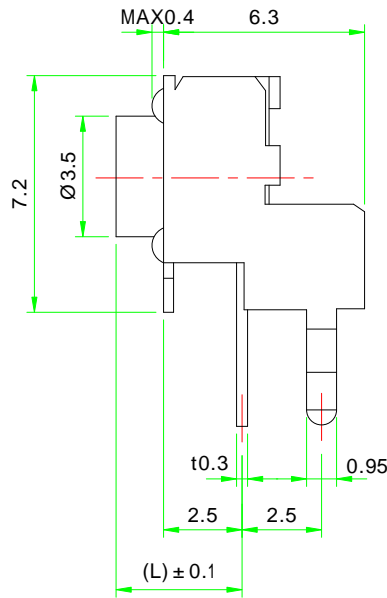


CIRCUIT DIAGRAM



NO	DESCRIPTION	SIZE	MAT'L	QTY	REMARK
1	CASE		NYLON 66	1	BLACK
2	STEM		NYLON 66	1	BLACK
3	BRACKET		Sn PLATE	1	
4	TERMINAL		C2680R	1	Ag CLATED
5	C/PLATE		C5210R-EH	1	Ag CLAD

MODEL NO.	(L)
IT-1102V	3.15
IT-1102VA	3.85
IT-1102VD	5.85
IT-1102VK	6.35
IT-1102VE	6.85
IT-1102VC	8.35
IT-1102VB	9.85
IT-1102VF	10.35
IT-1102VI	10.85
IT-1102VG	11.85
IT-1102VN	13.35
IT-1102VJ	13.85
IT-1102VH	15.85

NOTE

1. OPERATING FORCE : 130 ± 30gf, 160 ± 30gf
2. TRAVEL : 0.25 +0.2/-0.1mm
3. CONTACT RESISTANCE : 100m MAX
4. GENERAL TOLERANCE : ± 0.3
5. LIFE : 100,000 CYCLE MIN

6			
5			
4			
3			
2			
1			
NO.	DATE	REVISIONS	SIGN

DRAWN

DESIGNED

APPROVED

SCALE

4/1

3RD

DWG NO.

UNIT

mm

ANGLE

IT - 1102V

IN SUNG METAL CO.,LTD.

TITLE

TACT SWITCH